

NEW

NANKER



S3S

EN ISO 20345 : 2022 S3S SR FO LG SC CI HI HRO
ASTM F2413-18 M I C PR SD100
ESD EN 61340-5-1:2016

2022 STANDARD VERSION



1823 COGNAC | 36 ▶ 51

PRODUCT CHARACTERISTICS



HRO +300°C
(high heat-resistance)



Insulated sole
(cold)



Insulated sole
(heat)



Non-magnetic



ESD



7hr water-repellent
leather



Leather
upper



Offset
heel
LG



Stone guard
abrasion
resistance



Hydrocarbon
resistance

PARADE TECHNOLOGIES



Supports the arch
of the foot



Helps
expel soil

LG MARKING : SAFETY SCALE MOUNTING (UNHOLTED HEEL)

- SC-MARKED STONE GUARD
- ESD STANDARD
- HRO RUBBER GLIDE

COMPOSITION

Upper	Pull-up leather
Lining	3D mesh
Toe	Composite
Insole	Mesh over ESD PU foam. Removable
Anti-puncture sole	Fabric
Sole	PU inter / Nitrile rubber half-sole
Weight size 42*	850 g *Weight per shoe

Size coefficient 42	front		heel	
	Standard	Parade	Standard	Parade
Ceramic floor / Nals (soap solution)	0,36	0,51	0,31	0,47
SR Ceramic floor + glycerine	0,22	0,28	0,19	0,29

SAFETY TABLE



Toe protection
(Safety toe cap)



Slip-resistance**
Ceramic flooring + detergent



Energy-absorbing heel



Anti-static



Puncture-resistance
Non-metallic insert
PS = Small spike 3mm



Water-repellent upper



Heat-resistant outsole
(up to 300°C)



Slip resistance**
(ceramic floor + detergent)



Hydrocarbon resistance



Grip system (offset heel)



Abrasion resistance
with a scuff cap



Sole insulation (cold)



Sole insulation (heat)



Electrostatic dissipation


ENVIRONMENTAL DATA

At Parade, we carry out a life cycle analysis to measure the environmental impact of each of our models: from the extraction of raw materials, manufacturing, use, logistics, right through to the end of the product's life. Our environmental impact calculators, developed in-house using ADEME's EMPREINTE® database, have been certified by AFNOR for textiles and validated by the Pôle Eco-conception* for footwear.

*The Pôle Eco-conception is the French national centre for eco-design and life-cycle performance. Its expertise is recognised nationally and internationally by ADEME, the French Ministry of the Environment, AFNOR, ISO and the UN-environment.

CARBON FOOTPRINT BY 30%

in kg CO₂ equivalent*

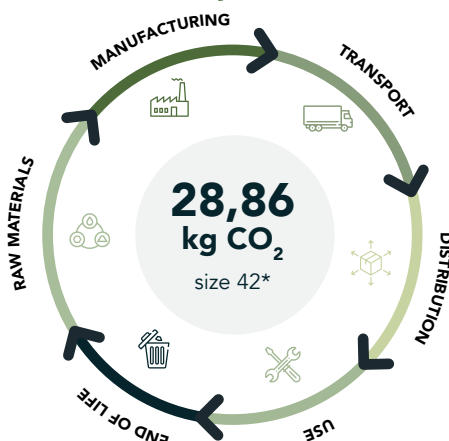


RAW MATERIALS	60%
Raw materials: contribution to the carbon footprint as a %	
MANUFACTURING	24%
Manufacturing: contribution to the carbon footprint as a %	
TRANSPORT	7%
Transport: contribution to the carbon footprint as a %	
DISTRIBUTION	4%
Distribution: contribution to the carbon footprint as a %	
USE	0%
Use: contribution to the carbon footprint as a %	
END OF LIFE	5%
End-of-life: contribution to the carbon footprint as a %	

* Based on a size 37 for women and a size 42 for men and unisex.

WATER POLLUTION

in kg Phosphate equivalent*

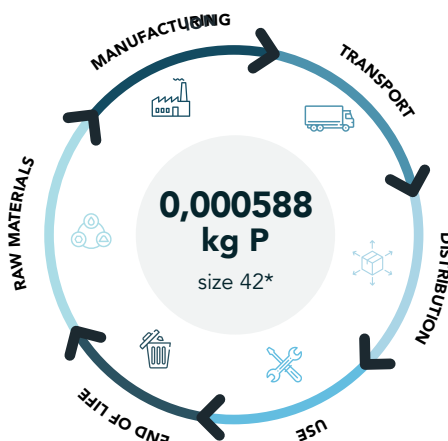

RAW MATERIALS	98%
Raw materials: contribution to water pollution as a %	
MANUFACTURING	0%
Manufacturing: contribution to water pollution as a %	
TRANSPORT	0%
Transport: contribution to water pollution as a %	
DISTRIBUTION	0%
Distribution: contribution to water pollution as a %	
USE	0%
Use: contribution to water pollution as a %	
END OF LIFE	1%
End of life: contribution to water pollution as a %	

► Packaging contains **at least 70 %** recycled materials



► Stitching country: **India** / Assembly country: **India** / Finishing country: **India**

EXTRAS



- VPS SYSTEM technology supports the arch of the foot
- FLEX SYSTEM technology to help evacuate soil during propulsion
- ESD standard
- HRO marking: heat resistance of the outsole (up to 300°)
- 7-hour moisture-resistant pull-up leather
- Very comfortable insole: constant resilience
- Triple stitching: reinforced resistance
- SC-marked stone guard
- Safe climbing (LG marking)